



ROLLER

Gravity Roller Conveyor
(1.9 in. Dia. x 16 Ga. Rollers)
(1.9 in. Dia. x 9 Ga. Rollers)

Over All Width	Between Rail Width	Model No.		Roller Centers	Weight (Lbs.)		Model No.		Roller Centers	Weight (Lbs.)	
		1.9" x 16 Ga.					1.9" x 9 Ga.				
		(Unplated)	(Galvanized)		5'	10'	(Unplated)			5'	10'
16"	13"	19SR-13-2 1/4	19GSR-13-2 1/4	2 1/4"	97	193	199SR-13-2 1/4		2 1/4"	122	239
		19SR-13-3	19GSR-13-3	3"	83	159	199SR-13-3		3"	113	220
		19SR-13-4 1/2	19GSR-13-4 1/2	4 1/2"	67	129	199SR-13-4 1/2		4 1/2"	87	170
		19SR-13-6	19GSR-13-6	6"	60	113	199SR-13-6		6"	75	143
18"	15"	19SR-15-2 1/4	19GSR-15-2 1/4	2 1/4"	105	210	199SR-15-2 1/4		2 1/4"	137	267
		19SR-15-3	19GSR-15-3	3"	89	170	199SR-15-3		3"	126	244
		19SR-15-4 1/2	19GSR-15-4 1/2	4 1/2"	71	137	199SR-15-4 1/2		4 1/2"	95	187
		19SR-15-6	19GSR-15-6	6"	64	120	199SR-15-6		6"	82	158
20"	17"	19SR-17-2 1/4	19GSR-17-2 1/4	2 1/4"	113	226	199SR-17-2 1/4		2 1/4"	152	295
		19SR-17-3	19GSR-17-3	3"	97	184	199SR-17-3		3"	139	267
		19SR-17-4 1/2	19GSR-17-4 1/2	4 1/2"	77	147	199SR-17-4 1/2		4 1/2"	104	203
		19SR-17-6	19GSR-17-6	6"	68	127	199SR-17-6		6"	89	169
22"	19"	19SR-19-2 1/4	19GSR-19-2 1/4	2 1/4"	121	242	199SR-19-2 1/4		2 1/4"	166	324
		19SR-19-3	19GSR-19-3	3"	108	207	199SR-19-3		3"	151	292
		19SR-19-4 1/2	19GSR-19-4 1/2	4 1/2"	85	163	199SR-19-4 1/2		4 1/2"	122	220
		19SR-19-6	19GSR-19-6	6"	75	139	199SR-19-6		6"	96	182
24"	21"	19SR-21-2 1/4	19GSR-21-2 1/4	2 1/4"	129	258	199SR-21-2 1/4		2 1/4"	178	350
		19SR-21-3	19GSR-21-3	3"	111	211	199SR-21-3		3"	161	313
		19SR-21-4 1/2	19GSR-21-4 1/2	4 1/2"	87	168	199SR-21-4 1/2		4 1/2"	119	235
		19SR-21-6	19GSR-21-6	6"	77	141	199SR-21-6		6"	101	193
26"	23"	19SR-23-2 1/4	19GSR-23-2 1/4	2 1/4"	137	274	199SR-23-2 1/4		2 1/4"	194	381
		19SR-23-3	19GSR-23-3	3"	118	229	199SR-23-3		3"	175	340
		19SR-23-4 1/2	19GSR-23-4 1/2	4 1/2"	93	179	199SR-23-4 1/2		4 1/2"	129	254
		19SR-23-6	19GSR-23-6	6"	81	152	199SR-23-6		6"	109	207
28"	25"	19SR-25-2 1/4	19GSR-25-2 1/4	2 1/4"	145	290	199SR-25-2 1/4		2 1/4"	208	409
		19SR-25-3	19GSR-25-3	3"	126	241	199SR-25-3		3"	167	363
		19SR-25-4 1/2	19GSR-25-4 1/2	4 1/2"	97	187	199SR-25-4 1/2		4 1/2"	137	270
		19SR-25-6	19GSR-25-6	6"	85	158	199SR-25-6		6"	116	219
		19SR-25-9	19GSR-25-9	9"	73	129	199SR-25-9		9"	94	169
		19SR-25-12	19GSR-25-12	12"	64	117	199SR-25-12		12"	80	148
30"	27"	19SR-27-2 1/4	19GSR-27-2 1/4	2 1/4"	153	307	199SR-27-2 1/4		2 1/4"	224	438
		19SR-27-3	19GSR-27-3	3"	133	255	199SR-27-3		3"	200	387
		19SR-27-4 1/2	19GSR-27-4 1/2	4 1/2"	102	196	199SR-27-4 1/2		4 1/2"	146	287
		19SR-27-6	19GSR-27-6	6"	89	166	199SR-27-6		6"	122	232
34"	31"	19SR-31-2 1/4	19GSR-31-2 1/4	2 1/4"	169	340	199SR-31-2 1/4		2 1/4"	252	493
		19SR-31-3	19GSR-31-3	3"	146	278	199SR-31-3		3"	224	433
		19SR-31-4 1/2	19GSR-31-4 1/2	4 1/2"	112	214	199SR-31-4 1/2		4 1/2"	162	319
		19SR-31-6	19GSR-31-6	6"	97	179	199SR-31-6		6"	135	257
36"	33"	19SR-33-2 1/4	19GSR-33-2 1/4	2 1/4"	177	356	199SR-33-2 1/4		2 1/4"	267	524
		19SR-33-3	19GSR-33-3	3"	154	292	199SR-33-3		3"	237	460
		19SR-33-4 1/2	19GSR-33-4 1/2	4 1/2"	117	224	199SR-33-4 1/2		4 1/2"	171	337
		19SR-33-6	19GSR-33-6	6"	101	187	199SR-33-6		6"	143	271
40"	37"	19SR-37-2 1/4	19GSR-37-2 1/4	2 1/4"	193	389	199SR-37-2 1/4		2 1/4"	295	579
		19SR-37-3	19GSR-37-3	3"	164	311	199SR-37-3		3"	261	506
		19SR-37-4 1/2	19GSR-37-4 1/2	4 1/2"	124	238	199SR-37-4 1/2		4 1/2"	188	369
		19SR-37-6	19GSR-37-6	6"	108	198	199SR-37-6		6"	156	296
42"	39"	19SR-39-2 1/4	19GSR-39-2 1/4	2 1/4"	201	405	199SR-39-2 1/4		2 1/4"	308	606
		19SR-39-3	19GSR-39-3	3"	173	328	199SR-39-3		3"	272	528
		19SR-39-4 1/2	19GSR-39-4 1/2	4 1/2"	130	250	199SR-39-4 1/2		4 1/2"	195	384
		19SR-39-6	19GSR-39-6	6"	112	207	199SR-39-6		6"	162	307

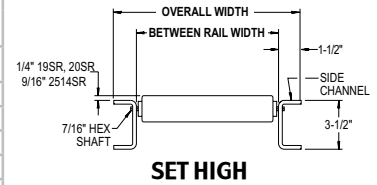

NOTE: All Standard Widths to be Offered in 1 ft. Length Increments - 1 Week Stockyard

• STANDARD SPECIFICATIONS

WIDTHS—Between Rail Width: 13 in., 15 in., 17 in., 19 in., 21 in., 23 in., 25 in., 27 in., 31 in., 33 in., 37 in., and 39 in.

FRAME—3 1/2 in. or 4 1/2 in. deep x 1 1/2 in. flange x 10 ga. powder painted formed steel channel with bolt-in cross members.

BUTT COUPLINGS—Bolt-on type for bolting sections together.

LENGTHS—5 ft. and 10 ft. straight sections.

ROLLERS—19-SR 1.9 in. dia. x 16 ga. unplated or galvanized steel tubing; 199-SR 1.9 in. dia. x 9 ga. unplated steel tubing. Bearings are labyrinth sealed and grease packed.

AXLES—7/16 in. hex shaft, spring loaded.

CAPACITY—See Load Capacity Chart this page.

LOAD CAPACITY CHART			
Support Centers	Frame Capacity (Lbs.) Max. Distributed Live Load Per Foot 620	Roller Capacity (Lbs.) Max. Load Per Roller	
		19SR/19GSR	199SR
5'	620	210	250
10'	118		

